

Product data sheet



Product features

- Underglass or overglass awning with ZIP guide
- Optimally combinable with NYON glass roof models
- Compact design

Dimensions

- PS2500: Width min. 195 cm, max. 600 cm
Projection min. 100 cm, max. 450 cm
- PS8000: Width min. 92 cm, max. 600 cm
Projection min. 100 cm, max. 600 cm

Installation method and slope

- Installation under the ceiling (model PS2500), 0° – 25° slope
- Horizontal on conservatory / structure, 0° – 60° slope
(min. 3° slope for water drainage)

Wind resistance

- Beaufort 6 (49.5 km/h)

Drive system / control

- Motor drive
- Operation optionally via wired switch, radio remote control, smart-home systems (e.g. KNX, TaHoma)
- Optional automatic system with sun, wind and rain sensor

Frame colours

- STOBAG Classic Colours C10 (RAL 9016), C12 (RAL 9010), C28 (RAL 9006), C30 (RAL 9007), C34 (DB703), C48 (RAL 7022), C50 (RAL 7016), C52 (RAL 9005)
- Optional colours according to the STOBAG LIFESTYLE or RAINBOW colour palette

Fabric

- Acrylic, Soltis Perform 92
- The application options depend on the specific product configuration

Certificates / Awards



EN 13561




reddot winner 2018


Warranty

- 5 years
Manufacturer's warranty 2 years, with the option to extend by an additional 3 years


Technical data (dimensions in mm)

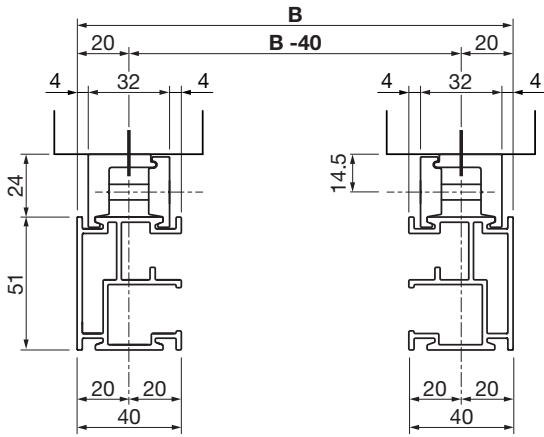


PS2500
Total width

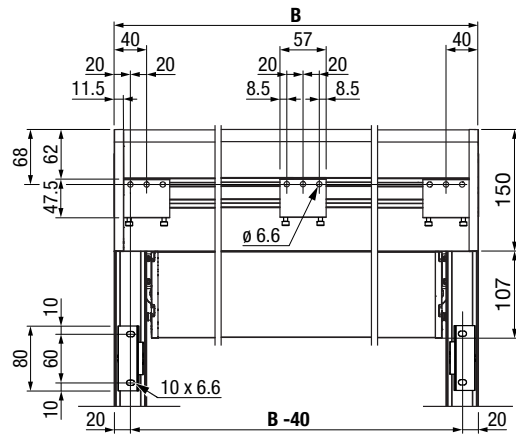


PS2500
Installation drawing
B = Total width

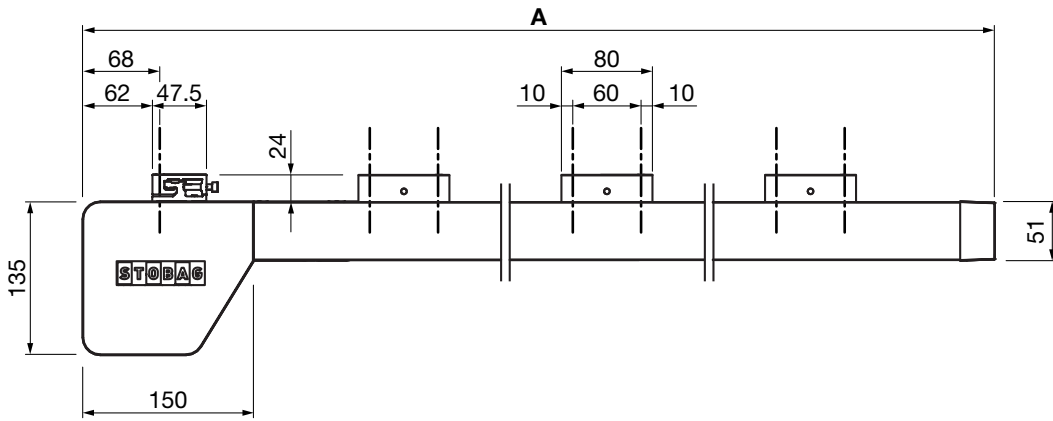

PS2500
Side view

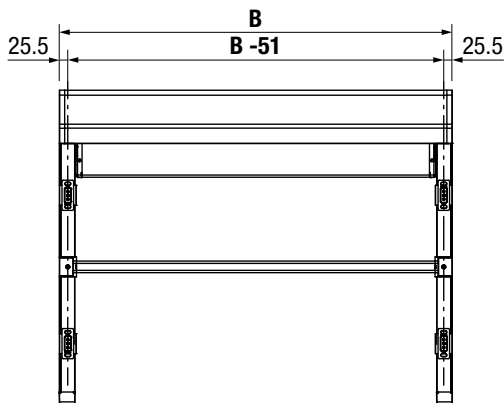

PS8000
Installation drawing
B = Total width

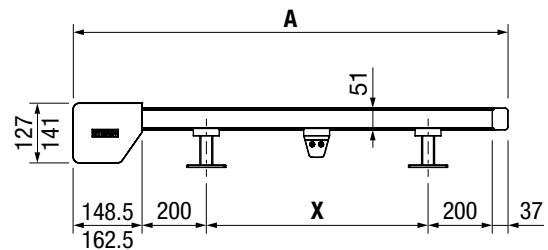

PS8000
Side view
A = Projection