


Product data sheet

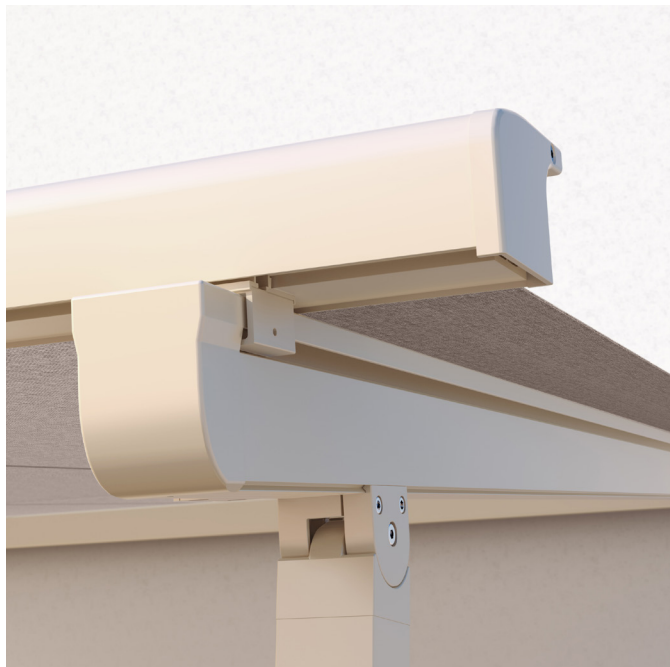

Product features

- Pergola awning with fabric canopy
- Individually repositionable supports and guide rails
- Automatic Stoblock system for taut fabric tensioning
- Optional integrated lighting

Dimensions

- Width min. 100 cm, max. 700 cm; with 3 guide rails for widths of 601 cm or more
- Projection min. 140 cm, max. 600 cm

Height

- Min. 55 cm, max. 250 cm

Installation method and slope

- Installation on the wall, 0° – 25° slope
- Installation under the ceiling by means of ceiling bracket, 0° – 25° slope
- Use in rain: at least 8° slope

Wind resistance

- Beaufort 6 (49.5 km/h)

Drive system / control

- Motor drive
- Operation optionally via wired switch, radio remote control, smart-home systems (e.g. KNX, TaHoma)
- Optional automatic system with sun, wind and rain sensor

Frame colours

- STOBAG Classic Colours C10 (RAL 9016), C12 (RAL 9010), C28 (RAL 9006), C30 (RAL 9007), C34 (DB703), C48 (RAL 7022), C50 (RAL 7016), C52 (RAL 9005)
- Optional colours according to the STOBAG LIFESTYLE or RAINBOW colour palette

Fabric

- Acrylic, Water
- The application options depend on the specific product configuration

Lighting

- Optional Tunable White LED lighting with dimmer function
- Can be optionally integrated on the box and / or guides
- Colour temperature: 2800 – 3200 K
- Luminous flux: 400 lm

Certificates / Awards




EN 13561


Warranty

- 5 years
- Manufacturer's warranty 2 years, with the option to extend by an additional 3 years


Technical data (dimensions in mm)

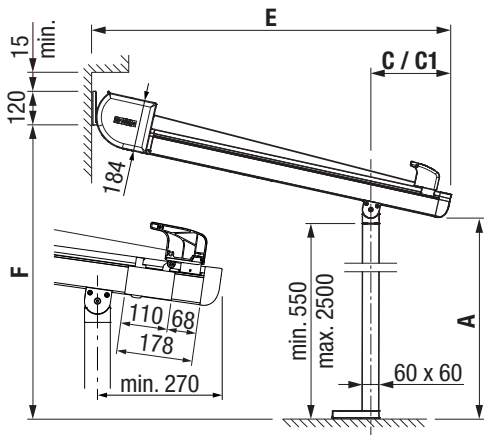


P3600
Wall mounting with footplate

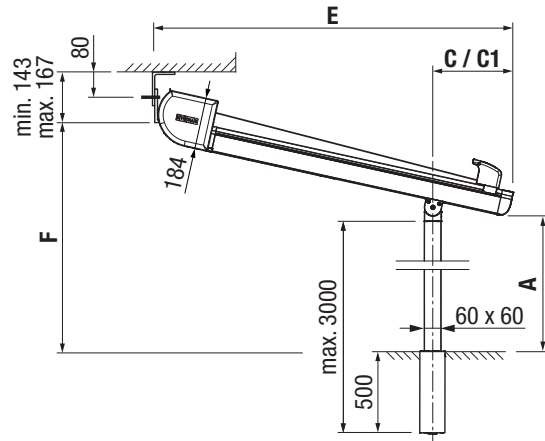


P3600
Ceiling mounting with ground socket

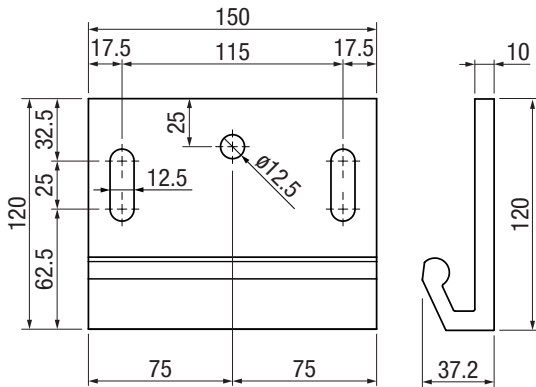


P3600
Bracket standard

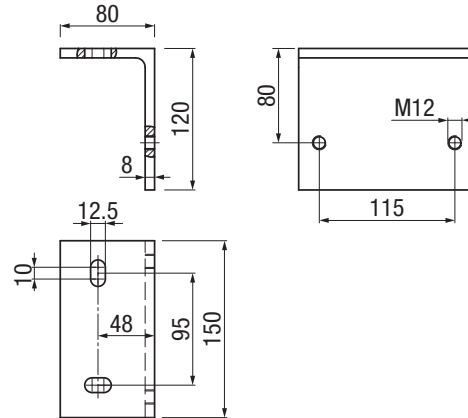


P3600
P333
Ceiling bracket

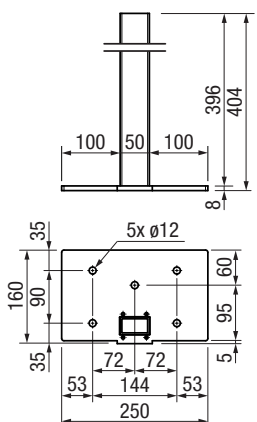

P3600
P363
Foot plate



1



1 + 1

P3600
Possible guide
roller tube variation