

Product data sheet



Product features

- Filigree balcony awning with folding arms
- Without mounting bar
- Easily and infinitely adjustable inclination angle during installation
- Installation under the ceiling requires only one mounting screw per bracket
- Optional top board selectable for installation on the wall
- With windlock mechanism

Dimensions

- S7000: Width min. 150 cm, max. 550 cm
Projection min. 120 cm, max. 250 cm
- S7200: Width min. 150 cm, max. 550 cm
Projection min. 120 cm, max. 300 cm

Installation method and slope

- S7000: Installation under the ceiling / 5° – 68° slope
- S7200: Installation on the wall / 5° – 40° slope

Wind resistance

- Beaufort 5 (38.5 km/h)
The wind resistance class may vary depending on the design and dimensions

Drive system / control

- Motor drive
- Optional: Gearbox with crank handle
- Operation optionally via wired switch, radio remote control, smart-home systems (e.g. KNX, TaHoma)
- Optional automatic system with sun, wind and rain sensor

Frame colours

- STOBAG Classic Colours C10 (RAL 9016), C12 (RAL 9010), C28 (RAL 9006), C30 (RAL 9007), C34 (DB703), C48 (RAL 7022), C50 (RAL 7016), C52 (RAL 9005)
- Optional colours: Lifestyle (matt and textured) and Rainbow

Fabric

- Acrylic and Oeko Weave
- Water
- Fire

Certificates / Awards




EN 13561


Warranty

- 5 years
Manufacturer's warranty 2 years, with the option to extend by an additional 3 years


Technical data (dimensions in mm)

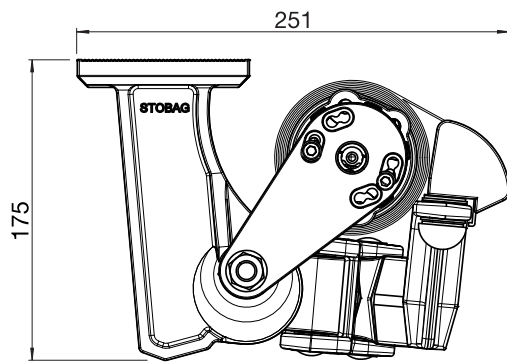


S7000
Ceiling installation

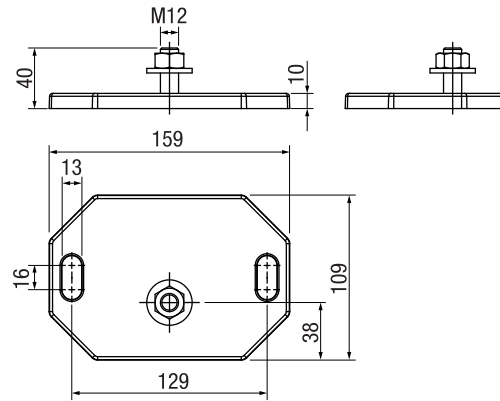

S7000
S762
Magnifying plate

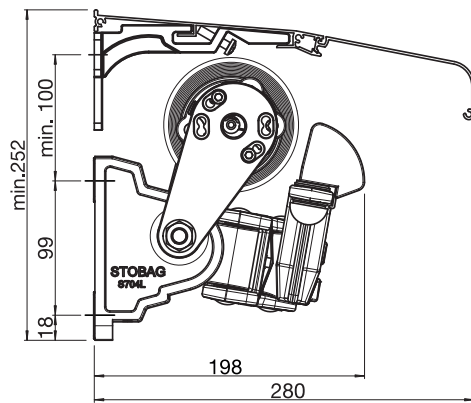

S7200
Wall installation
with optional protective roof S847/1

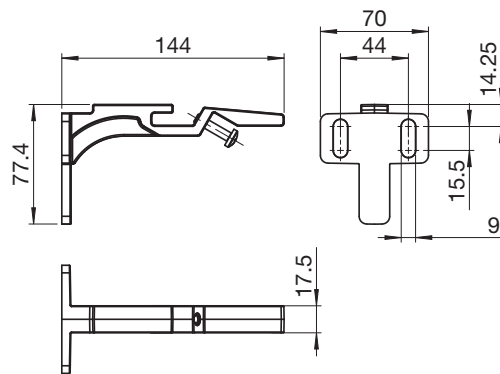

S7200
Wall bracket S751/1