

SURAVA Hide

Vertical awning
for installation in recesses
VA3100

Product data sheet



Product features

- Part of the SURAVA range: one of three premium options for vertical shading – maximum flexibility of use and consistent design
- Shaded area up to 20 m²
- Vertical awning for installation in recesses, designed to blend seamlessly into the façade
- Enclosed underside thanks to cover panel
- Fabric guide: Wire-rope or rod guide, guide rail
1- or 2-piece rail with or without ZIP system
No chink of light between fabric and rail
- Technical assembly with innovative engineering, featuring a simple click-in system, ensures a smooth and efficient installation process

Dimensions

- Width min. 80 cm, max. 425 cm
Projection min. 45 cm, max. 300 cm

Installation method

In the recess:

- Installation on the wall
- Installation under the ceiling
- In-reveal installation

Wind resistance

- Beaufort 6 (49.5 km/h)
The wind resistance class may vary depending on the design and dimensions

Drive system / control

- Motor drive
- Operation optionally via wired switch, radio remote control, smart-home systems (e.g. KNX, TaHoma)
- Optional automatic system with sun, wind and rain sensor

Frame colours

- STOBAG Classic Colours C10 (RAL 9016), C12 (RAL 9010), C28 (RAL 9006), C30 (RAL 9007), C34 (DB703), C48 (RAL 7022), C50 (RAL 7016), C52 (RAL 9005)
- Optional colours: Lifestyle (matt and textured) and Rainbow

Fabric

- Acrylic and Oeko Weave
- Soltis Perform 86
- Soltis Perform 92
- Soltis Blockout B92
- Soltis Veozip
- Screens 1%
- Screens 5%
- Twilight

Certificates / Awards




EN 13561


Warranty

- 5 years
Manufacturer's warranty 2 years, with the option to extend by an additional 3 years


Technical data (dimensions in mm)

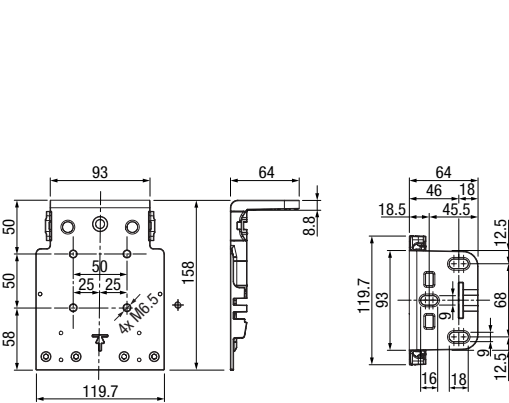


VA3100 Hide
Ceiling / floating bracket VA310

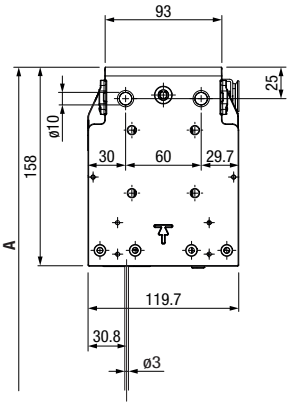

VA3100 Hide
Mounting with cable guide

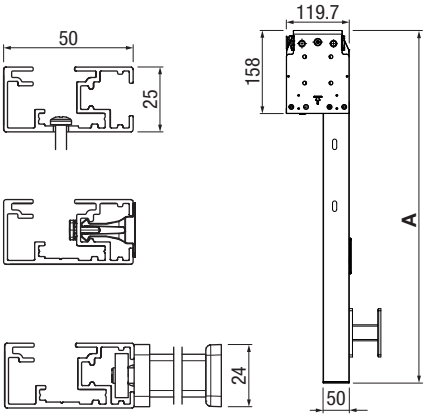

VA3100 Hide
1-piece guide rail VA110

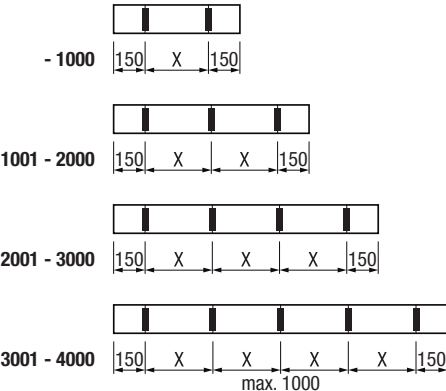

VA3100 Hide
Arrangement and number of mounting brackets / attachments