

Product data sheet



Product features

- Closed box shields awning from weather effects
- Choice of square or round design
- Simple and proven mounting system for attachment
- Optionally selectable: Drop valance with rounded design: Acrylic fabric up to max. 110 cm and Soltis 86 / 88 / 92 up to max. 160 cm height
- Optionally selectable: Drop valance can be controlled either by crank handle or by handheld transmitter (solar io radio motor)
- Battery for approx. 40 cycles, tiltable solar panel for optimal utilisation of sunlight
- Optional cover as a privacy screen on the fabric roller
- Optional wall connection profile prevents rainwater between facade and awning
- Optional console cover profile

Dimensions

- Width min. 195 cm, max. 650 cm
- Projection min. 150 cm, max. 400 cm

Installation method and slope

- Installation on the wall
- Installation under the ceiling
- Installation on rafters
- Awning slope adjustable from 0° to 85°

Wind resistance

- Beaufort 5 (38.5 km/h)
The wind resistance class may vary depending on the design and dimensions

Drive system / control

- Motor drive
- Optional for width up to 6 m without motor: Gearbox with crank handle
- Operation optionally via wired switch, radio remote control, smart-home systems (e.g. KNX, TaHoma)
- Optional automatic system with sun, wind and rain sensor

Frame colours

- STOBAG Classic Colours C10 (RAL 9016), C12 (RAL 9010), C28 (RAL 9006), C30 (RAL 9007), C34 (DB703), C48 (RAL 7022), C50 (RAL 7016), C52 (RAL 9005)
- Optional colours: Lifestyle (matt and textured) and Rainbow

Fabric

- Acrylic and Oeko Weave
- Soltis Lounge 96, microperforated
- Water
- Fire
- Lowerable Volant-Plus:
Acrylic / Soltis Horizon 86 / Soltis Harmony 88 / Soltis Perform 92 / Screens 1% / Screens 5% / Twilight / Water / Fire

Certificates / Awards




EN 13561


Warranty

- 5 years
Manufacturer's warranty 2 years, with the option to extend by an additional 3 years


Technical data (dimensions in mm)

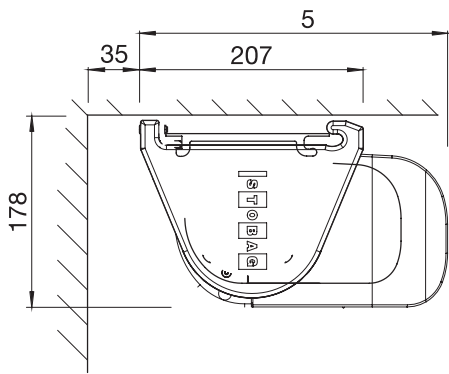

BX3000
Side view top installation
rounded

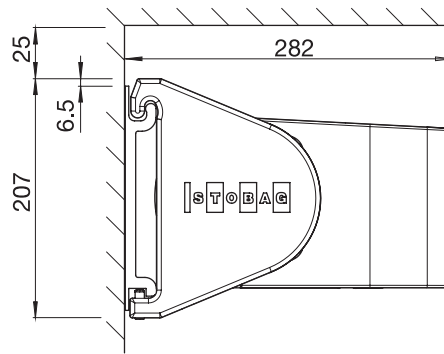

BX3000
Side view wall installation
rounded

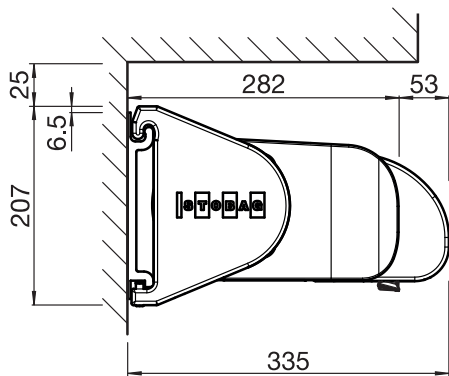

BX3000
Wall fixing with drop-down valance
Front rail rounded