VISOMBRA

Drop-arm / adjustable drop-arm awning
FS6000

Product data sheet



Product features

- Drop-arm awning combined with the benefits of a vertical awning: featuring slanted fabric that allows daylight into the room and preserves the view to the outside
- The perfect balance of light and shade at all times – for a comfortable indoor climate
- The design allows the projection point to be adjusted freely and precisely
- Projection point: min. 65 cm, max. 285 cm
- Drop angle up to 90° or 170° (150° for FS4200)
- Rounded or square protective box

Dimensions

- Width min. 40 cm, max. 400 cm
  Projection min. 125 cm, max. 350 cm

Installation method

- Installation on the wall
- In-reveal installation
- Self-supporting installation

Wind resistance

- Beaufort 6 (49.5 km/h)
  The wind resistance class may vary depending on the design and dimensions

Drive system / control

- Motor drive
- Operation optionally via wired switch, radio remote control, smart-home systems (e. g. KNX, TaHoma)
- Optional automatic system with sun, wind and rain sensor

Frame colours

- STOBAG Classic Colours C10 (RAL 9016), C12 (RAL 9010), C28 (RAL 9006), C30 (RAL 9007), C34 (DB703), C48 (RAL 7022), C50 (RAL 7016), C52 (RAL 9005)
- Optional colours: Lifestyle (matt and textured) and Rainbow

Fabric

- Acrylic and Oeko Weave
- Soltis Perform 86
- Soltis Perform 92
- Soltis Blockout B92
- Screens 1%
- Screens 5%
- Twilight
- Fire

Certificates / Awards

CE
EN 13561

Warranty

- 5 years
  Manufacturer's warranty 2 years, with the option to extend by an additional 3 years

Technical data (dimensions in mm)

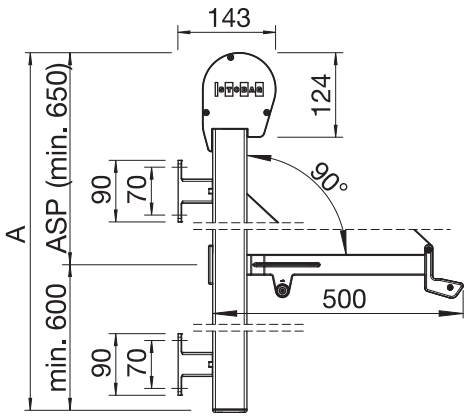

FS6000
Exposed with round box

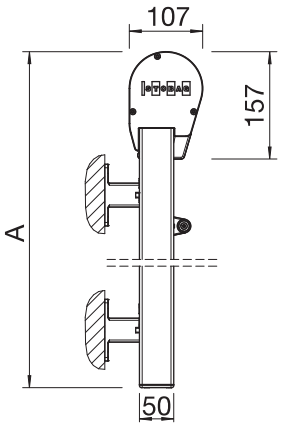

FS6000
Retracted with round box

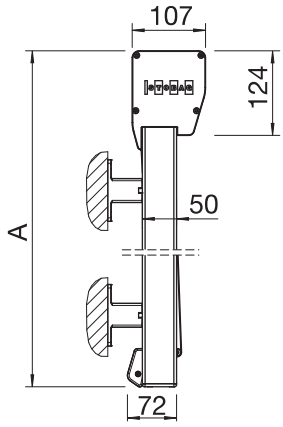

FS6000
Exposed with square box

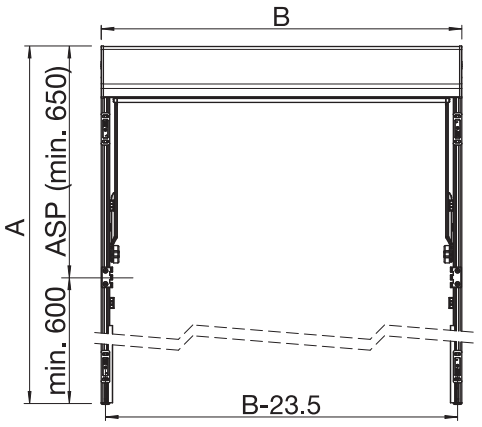

FS6000
Installation plan
W = Width / ASP = Exposed point

Digital version – 2026-11 – © STOBAG – Subject to change. Depending on the country or region, the technical details, scope of delivery, guarantee conditions, design and availability may differ from the specifications contained in this document.